


Part Code	A nominal mm (inch)	B mm (inch)	C mm (inch)	D min mm (inch)	Grip Range mm (inch) in 6 mm (0.236) steps	Clamping Force Range N (lbf)	No of Cycles
0532-L6	3.96 (0.156)	Varies depending on grip range requested by customer.	3.50 (0.137) to 4.50 (0.177)	7.00 (0.275)	1mm (0.039) to 150mm (5.905)	890 (200) - 2,669 (600)	500
0632-L6	4.76 (0.188)			9.00 (0.354)	1mm (0.039) to 150mm (5.905)	1,112 (250) - 3,336 (750)	500
0832-L6	6.35 (0.250)			12.00 (0.472)	1mm (0.039) to 150mm (5.905)	1,334 (300) - 4,000 (900)	500
1032-L6	7.94 (0.313)			15.00 (0.590)	1mm (0.039) to 150mm (5.905)	1,779 (400) - 5,338 (1,200)	500
1232-L6	9.53 (0.375)			19.00 (0.748)	1mm (0.039) to 150mm (5.905)	1,779 (400) - 5,338 (1,200)	500
1432-L6	11.15 (0.438)			22.00 (0.866)	1mm (0.039) to 150mm (5.905)	1,779 (400) - 5,338 (1,200)	500
1632-L6	12.70 (0.500)			24.00 (0.945)	1mm (0.039) to 150mm (5.905)	1,779 (400) - 5,338 (1,200)	500
1832-L6	14.24 (0.563)			27.00 (1.063)	1mm (0.039) to 150mm (5.905)	2,224 (500) - 6,672 (1,500)	500
2032-L6	15.90 (0.625)			30.00 (1.181)	1mm (0.039) to 150mm (5.905)	2,224 (500) - 6,672 (1,500)	500
2432-L6	19.05 (0.750)			38.00 (1.496)	1mm (0.039) to 150mm (5.905)	2,669 (600) - 8,000 (1,800)	500
3232-L6	25.40 (1.000)			48.00 (1.889)	1mm (0.039) to 150mm (5.905)	2,669 (600) - 8,000 (1,800)	500

Head Types | FP = Flat Protruding | SP = Countersunk Protruding | SF = Countersunk Flush | Grip Length Increments | 6mm

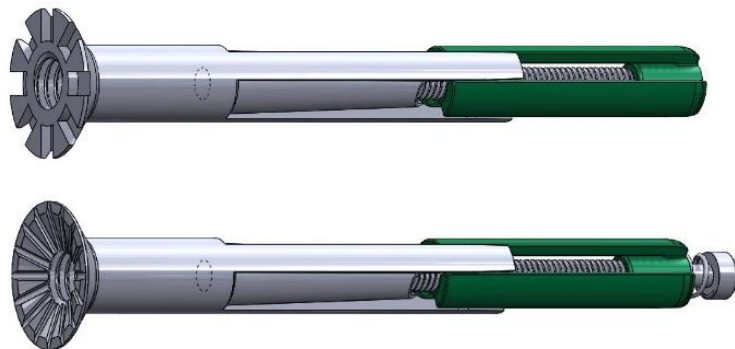

XX-0632A-XXX-XXX-AXL6

Kwikbolt Part Numbering

- Basic Part Number
- Grip Range
- Nominal Hole Diameter
- Head Configuration: SF-Countersunk Flush
SP-Countersunk Protruding
FP-Flat Protruding

Colour coding to customer specifications. Other loads, tolerances and diameters available to customer requirements

E-Mail: info@kwikbolt.com

Web: www.kwikbolt.com

Phone: +44 (0) 23 8220 5775